
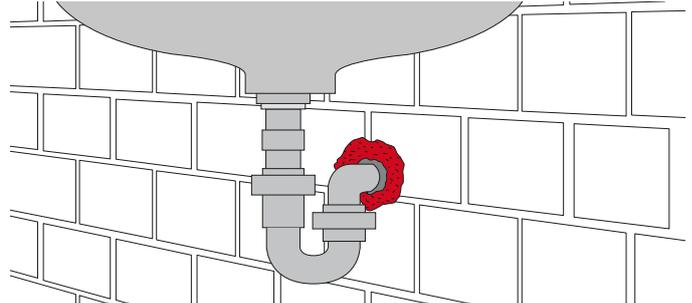


Filling foam CF-F

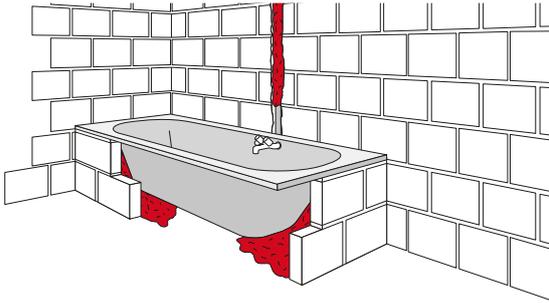

Applications

- Gaps and cracks
- Drywall voids
- Gaps or cavities for electrical fittings
- Backfilling for sealants
- Holes left by concrete forms
- Filling gaps

Advantages

- Easy to use - finger dispensing
- High adhesive strength
- Stops air infiltration

Technical data

Approx. density	25 kg/m ³
Foam yield (up to)	34 l
Approx. cut time (at 23°C / 50% rel. humidity)	30 min
Min. time before loadbearing	Approx. 3-5 h
Application temperature range	5 - 30 °C
Temperature resistance range	-40 - 80 °C
Content per can/cartridge	750 ml
Colour	Manila
Storage and transportation temperature range	5 - 25 °C
Approx. tensile strength	0.06 N/mm ²



Ordering designation	Sales pack quantity	Item number
CF-F 750	1 pc	369811

Please visit our website for the latest item numbers and related products.