


Firestop mortar CP 637

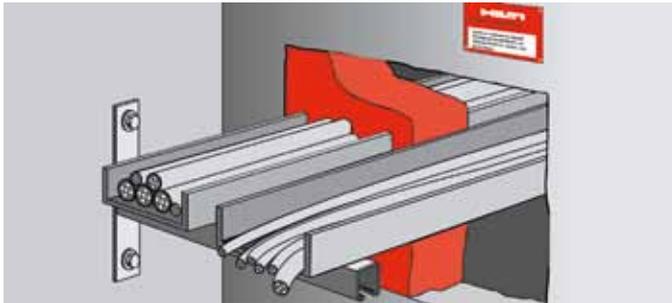

Applications

- Permanent fire seal for cables and cable trays
- Permanent fire seal for non-combustible pipes and combustible pipes (in combination with collars or wraps)
- Medium to large multiple penetrations in concrete and masonry in combination with other products

Advantages

- Quick-setting - forms can be removed in as little as 2 hours
- Superior working properties - saves time
- Can be pumped, poured or trowelled - easy to form and apply
- Can be used in horizontal or vertical applications
- Low shrinkage



Technical data

Base materials	Concrete, Aerated concrete, Masonry
Intumescent	No
Application temperature range	5 - 45 °C
Reusable (and removable)	Not possible
Setting time (approx.)	45 min
Fire rating	See Approvals
Working time (approx.)	30 min
Temperature resistance range	-20 - 100 °C
Storage and transportation temperature range	5 - 35 °C
Approvals	BS 476-20



Ordering designation	Sales pack quantity	Item number
CP 637 FS GB	1 pc	340785

Please visit our website for the latest item numbers and related products.